


STRUCTURAL NOTES			
CLEAR COVER TO REINFORCEMENT			
WALL PANEL	2"	AT ENDS	
	1 1/2"	#5 & BELOW AT EXTERIOR FACE	
	2"	#6 & ABOVE AT EXTERIOR FACE	
	3/4"	AT INTERIOR FACE	


  

LEGENDS	LABEL LEGENDS
T - TOP	6x2x6 #4 4C04 @12" B2
B - BOTTOM	NOTES
V, VERT - VERTICAL	SPACING
H, HORIZ - HORIZONTAL	BAR MARK
CLR - CLEAR COVER	BAR SIZE
SIM - SIMILAR	NUMBER OF BARS
TYP - TYPICAL	EACH FACE/EACH SIDE
T.O.MAT - TOP OF MAT	NUMBER OF LOCATION
ES - EACH SIDE	
EF - EACH FACE	
CONT - CONTINUOUS	
COR - CORNER	
THK - THICKNESS	
ADDL - ADDITIONAL	
DIAG - DIAGONAL	
NTS - NOT TO SCALE	
CLR - CENTER LINE	
SDR - STRUCTURAL DRAWING REFERENCE	

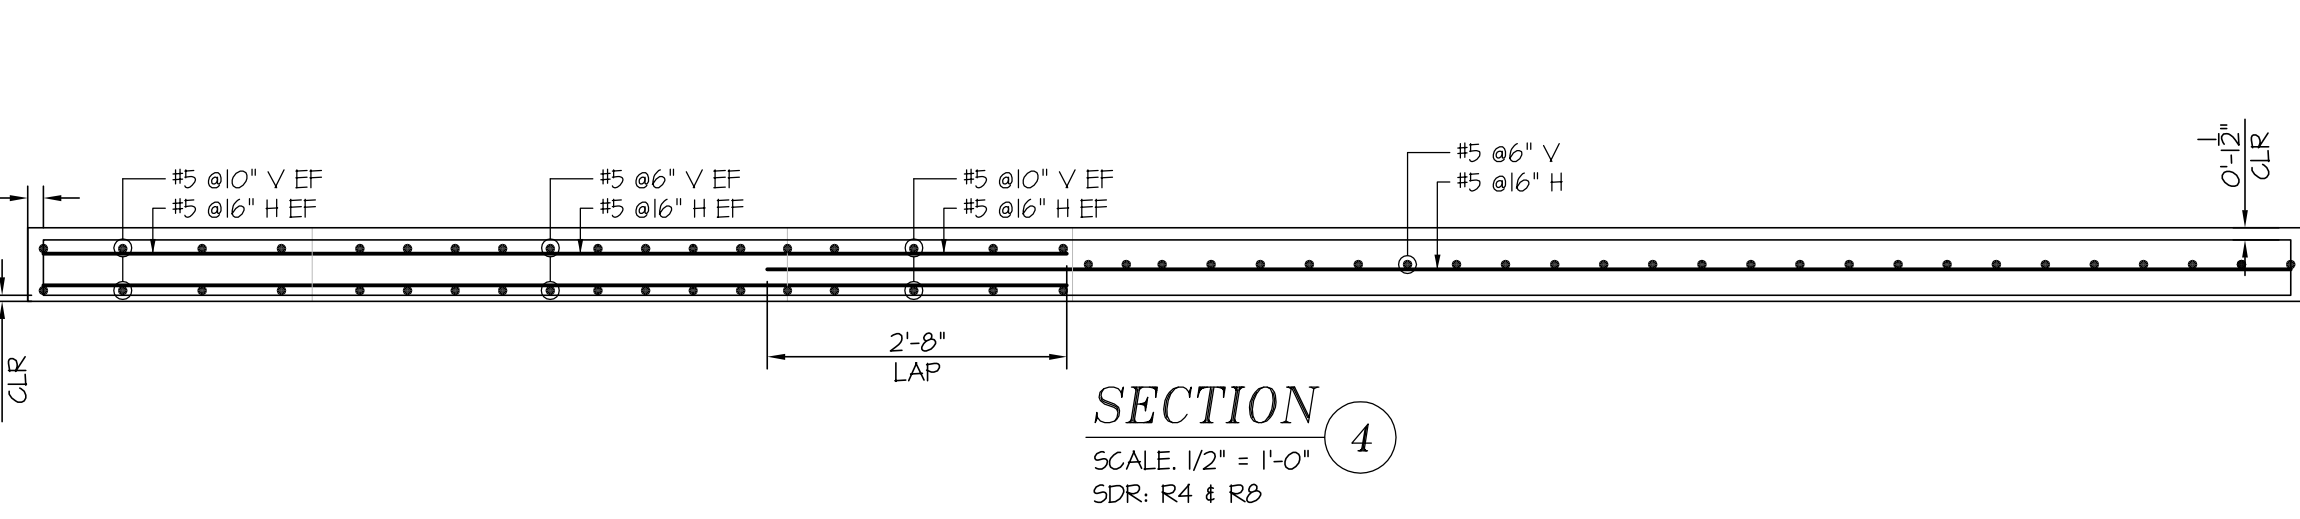

BENDING DETAILS													
Bar Mark	Qty	Size	Total Length	Type	X'	Y'	Z'	W'	V'	U'	T'	S'	R'
3A03	123	#3	0'-0.8"	T1	0'-4"	3'-6"	0'-8.8"	3'-6"				0'-4"	
3A18	42	#3	0'-2.8"	T1	0'-4.8"	3'-2"	0'-7"	3'-2"				0'-4.8"	
3A20	588	#3	3'-4.8"	T1	0'-4.8"	1'-7.8"	0'-8.8"	1'-7.8"				0'-4.8"	
4A02	60	#4	4'-0"	T7		2'-2"	2'-2"						
5A06	24	#5	5'-11.8"	T4	0'-10"	3'-3.8"	1'-10"					2'-3.8"	
5A15	54	#5	6'-0"	3		2'-2"	3'-10"					2'-8"	
5A17	28	#5	6'-3"	3		0'-10"	5'-5"					3'-10.8"	
5A21	21	#5	5'-7"	T7		2'-0"	1'-7"	2'-0"					

EAST WALL PANELS PLACING DRAWING REFERENCE	
DWG.NO:	DRAWING DESCRIPTION
R-1	EAST WALL PANELS E1 TO E8
R-2	EAST WALL PANELS E9 TO E17
R-3	EAST WALL PANELS E18 TO E23

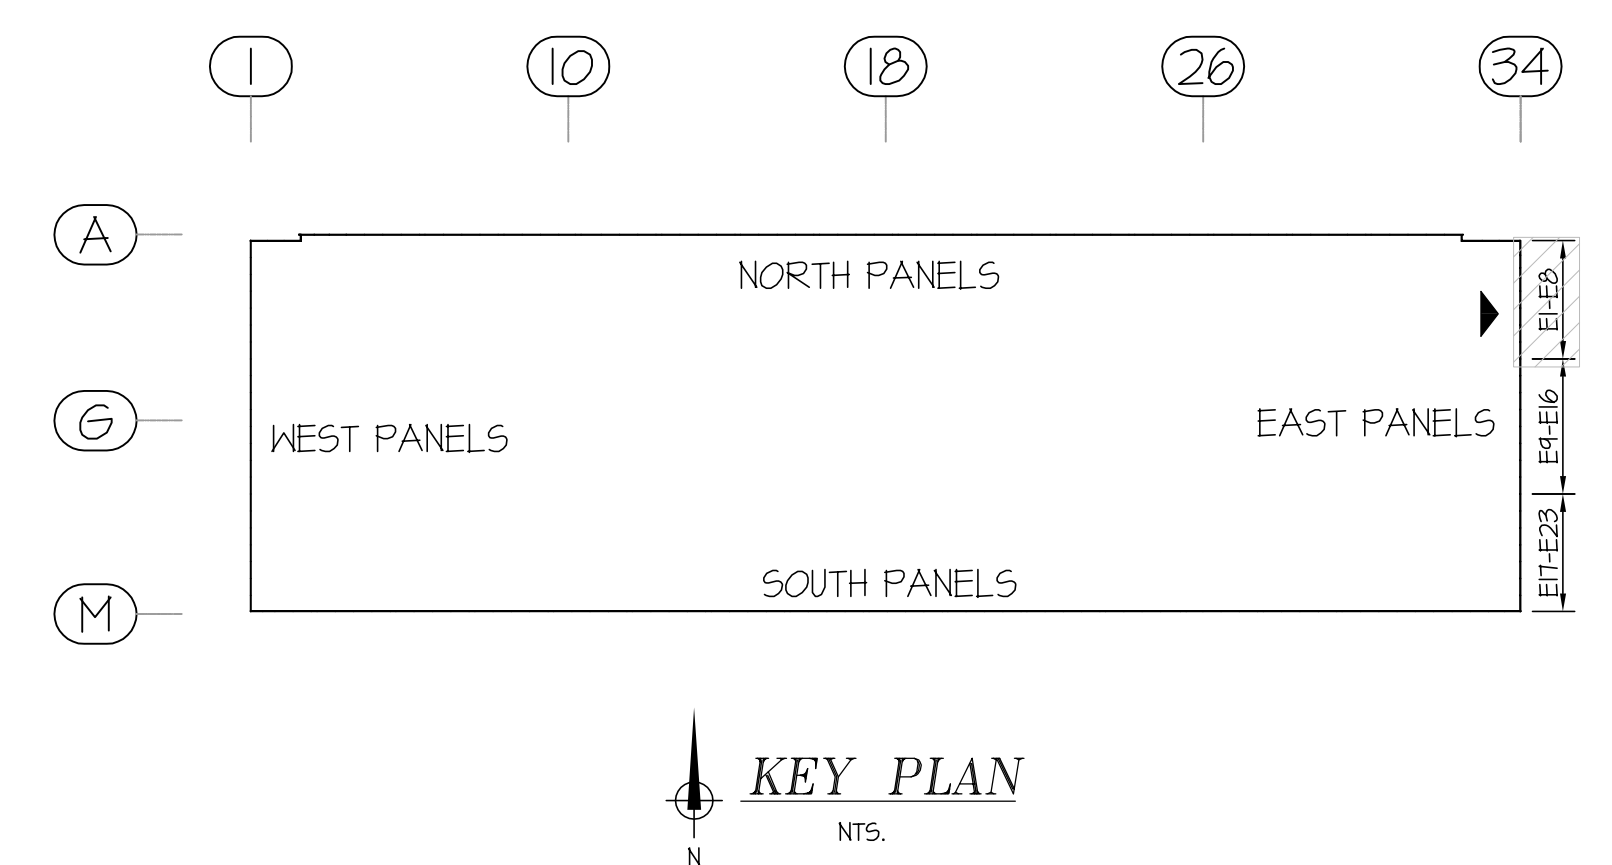

REINFORCING STEEL PLACING DRAWING ONLY. USE IN CONJUNCTION WITH CONTRACT DRAWINGS & SPECIFICATIONS. ELEVATIONS & DIMENSIONS SHOWN ON THIS DRAWING ARE FOR DETAILING PURPOSES ONLY AND SHOULD NOT BE USED FOR CONSTRUCTION UNLESS VERIFIED BY ENGINEER OR CONTRACTOR.

7		
6		
5		
4		
3		
2		
1	05.23.2019	APPROVAL
	DATE	SENT FOR
<b>RE-STEEL SUPPLY CO., INC.</b>		
REINFORCING STEEL - WIRE MESH		
2000 Eddystone Industrial Park • Eddystone, PA 19022-1588		
Phone: 800-876-8716 • Fax: 610-876-8428		
Structure	VALLEY VIEW BUSINESS PARK TILT PANELS	
Location	JESSUP, PA	
Architect	-	
Engineer	RICHARD ADAMS ENGINEERS & CONSULTANTS, INC.	
Customer	T&T CONSTRUCTION	
Made by:	PRO	DATE: 05.23.2019
DRAWING COVERS		CONTRACT NO.
EAST WALL PANELS		U2524
E1 TO E8		DRAWING NO.
		R-1